


PRODUCT DATA SHEET

GEO-DRAIN QUATTRO

Product Code: DMS006

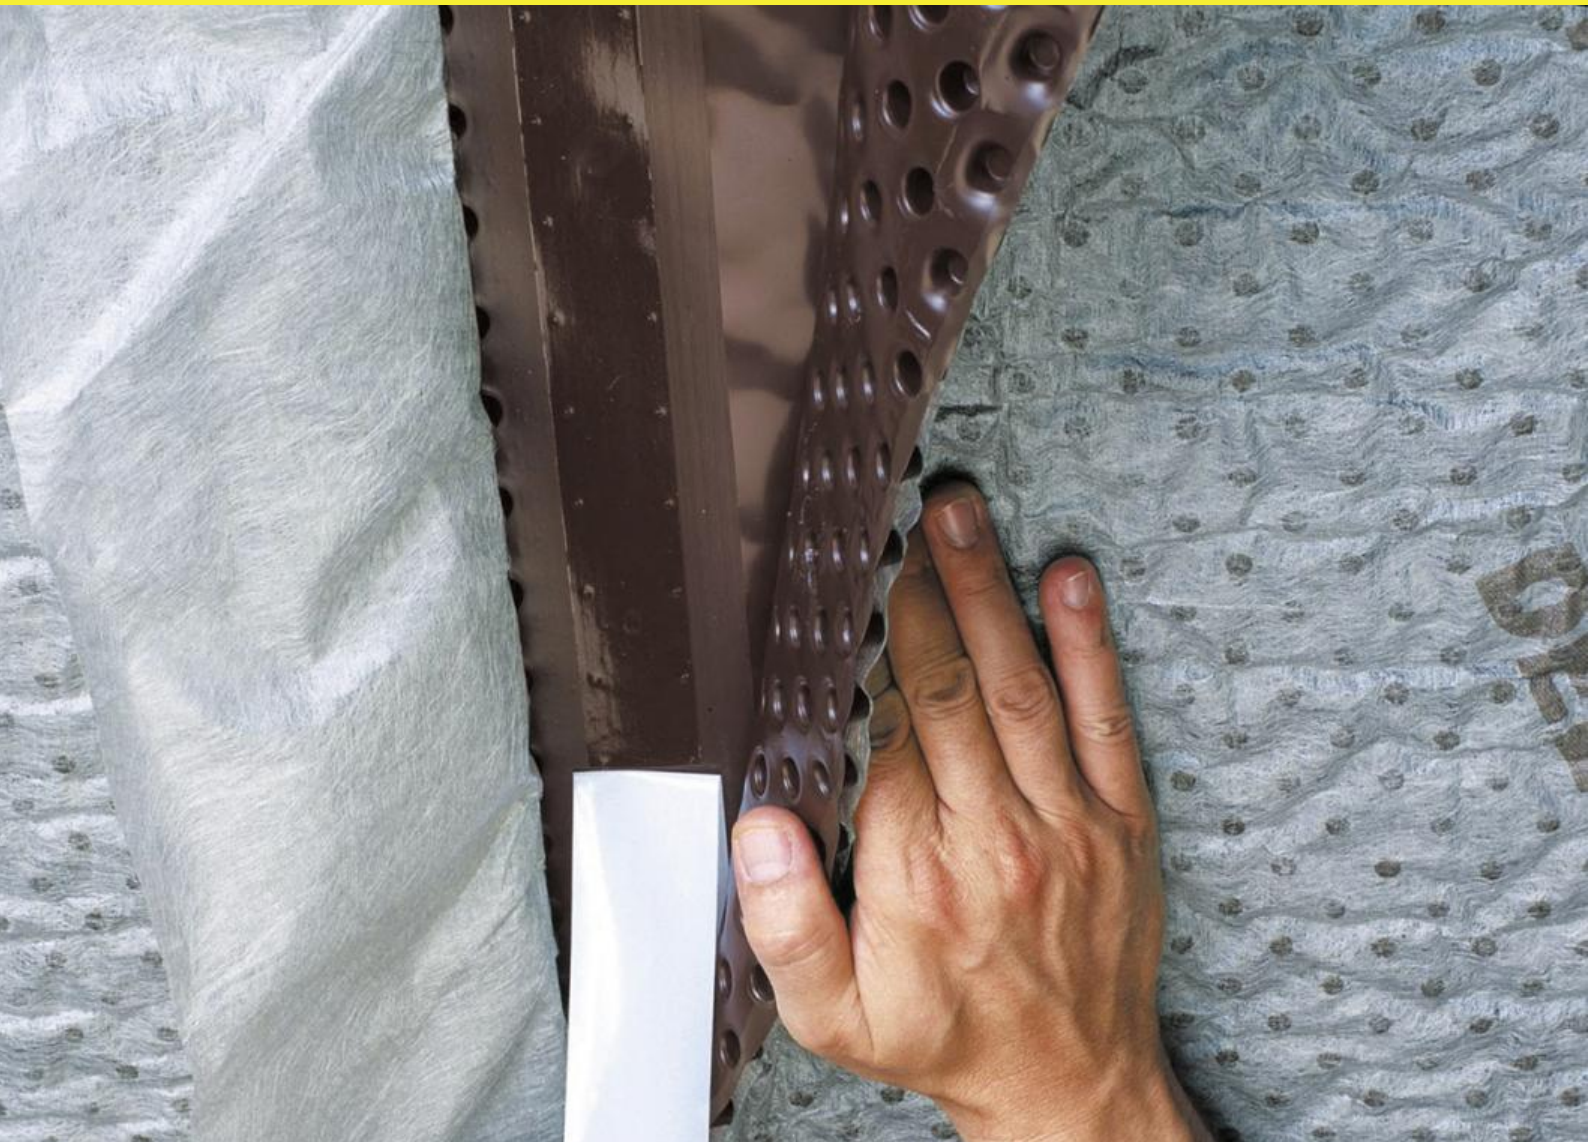

info@deltamembranes.com

www.deltamembranes.com

01992 523 523

Delta Geo-Drain Quattro is an external cavity drain membrane with four layers designed to be externally applied as a protective layer installed over a flexible waterproof coating like Koster Deuxan 2C.

It has very high compression strength, protecting the primary waterproofing during backfilling. When used externally below ground, the GeoDrain membrane can deal with hydrostatic water pressure, creating a cavity for any water to pass into and filter down to a land drain. It can then be taken away from the building by either natural means or by a pumping station.



BENEFITS

- Easy and quick to apply straight off the roll
- Effectively prevents the buildup of water pressure on the waterproof coating
- Improved slip performance
- High resistance to compression due to a special dimple design
- Outstanding drainage capacity for dealing with unusually large quantities of water
- Rot-proof



SPECIFICATION

- NBS Specification J40 295A flexible sheet tanking/damp proofing



ASSOCIATED PRODUCTS

- Koster Waterproofing
- Geo-Drain Clips
- Delta MS Profile
- Delta Haftangel (self- adhesive pins)

PRODUCT DATA SHEET

GEO-DRAIN QUATTRO

Product Code: DMS006

TECHNICAL DATA

Stud Height	9mm (approx)
Roll Size	2m x 12.5m
Material	High Density Polyethylene
Compressive Strength	400 kN/m ² (approx)
Temperature Resistance	-30°C to +80°C

